

## GBW15Y (ALT. M)



### Main Features

Frequency	Hz	50
Voltage	V	400
Power factor	cos $\phi$	0.8
Phase		3

### Power Rating

Emergency Standby Power ESP	kVA	13.70
Emergency Standby Power ESP	kW	10.96
Prime power PRP	kVA	13.00
Prime power PRP	kW	10.40

### Ratings definition (ISO-8528)

#### ESP - Emergency Standby Power:


It is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.

#### PRP - Prime Power:

It is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output over 24 h of operation shall not exceed 70 % of the prime power.

## Engine specifications

Engine Brand	Yanmar	
Model	3TNV88-BGPGEC	
[50Hz] Exhaust emission level	Not regulated	
Engine cooling system	Water	
Nr. of cylinder and disposition	3 in line	
Displacement	cm <sup>3</sup>	1642
Aspiration	Natural	
Speed governor	Mechanical	
Prime gross power PRP	kW	13.3
Maximum gross power LTP ESP	kW	14
Oil capacity	l	6.9
Coolant capacity	l	2
Fuel	Diesel	
Specific fuel consumption 75% PRP	g/kWh	250
Specific fuel consumption PRP	g/kWh	250
Starting system	Electric	
Electric circuit	V	12

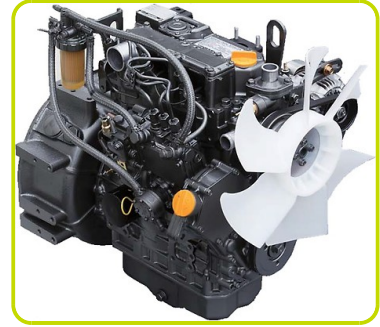

## Engine Equipment

### Standards

The above ratings represent the engine performance capabilities to conditions specified in ISO 8528/1, ISO 3046/1:1986, BS 5514/1

### Fuel system

- Direct injection system
- Fuel filter paper element
- Fuel pump Bosch in-Line

### Lube oil system

- Forced feed system
- Trochoid pump
- Paper element lube oil filter

### Induction system

- Mounted air filter

### Cooling system

- Thermostatically-controlled system with gear-driven circulation pump and belt-driven pusher fan
- Mounted radiator and piping

## Alternator Specifications

Alternator	Mecc Alte	
Model	ECP28-1S/4C	
Voltage	V	400
Frequency	Hz	50
Power factor	cos $\phi$	0.8
Poles	4	
Type	Brushless	
Voltage tolerance	%	1
Efficiency @ 75% load	%	87.5
Class	H	
IP protection	23	



### Mechanical structure

Robust mechanical structure which permits easy access to the connections and components during routine maintenance check-ups.

### Voltage regulator

Voltage regulation with DSR. The digital DSR controls the range of voltage, avoiding any possible trouble that can be made by unskilled personnel. The voltage accuracy is  $\pm 1\%$  in static condition with any power factor and with speed variation between 5% and +30% with reference to the rated speed.



### Windings / Excitation system

Generator stator is wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches. MAUX (Standard): The MAUX MeccAlte Auxiliary Winding is a separate winding within the main stators that feeds the regulator. This winding enables to take an overload of 300% forced current (short circuit maintenance) for 20 seconds. This is ideal for motor starting requirements.

### Insulation / Impregnation

Insulation is of class H standard. Impregnation is made with premium tropicalised epoxy resins by dipping and dripping. High voltage parts are impregnated by vacuum, so the insulation level is always very good. In the high-power models, the stator windings undergo a second insulation process. Grey protection is applied on the main and exciter stator to give enhanced protection.

### Reference standards

Alternator manufactured according to , and complies with , the most common specification such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, CAN/CSA-C22.2 No14-95-No100-95.

## Genset equipment

### BASE FRAME MADE OF WELDER STEEL PROFILE, COMPLETE WITH:

- Anti-vibration mountings properly sized
- Visual fuel level indicator
- Integrated support legs.

### PLASTIC FUEL TANK, COMPLETE WITH:

- Filler neck
- Air breather (ventilation pipe)
- External fuel refilling

### OIL DRAININ PIPE WITH CAP:


- Oil draining facilities

### CANOPY:

- Single piece hinged soundproof canopy equipped with pneumatic arms and handles to lift up the canopy allowing easy access to the genset for maintenance purposes.
- Simple handling operations with central lifting eye


### SOUNDPROOF:

- Noise attenuation thanks to soundproofing material (polyurethane foam) and efficient residential silencer placed inside the canopy.

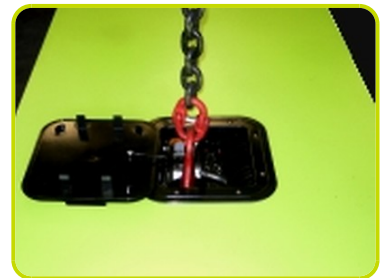

### Dimensional data

Length	(L) mm	1640
Width	(W) mm	900
Height	(H) mm	1075
Dry weight	kg	470
Fuel tank capacity	l	51
Fuel tank material		Plastic

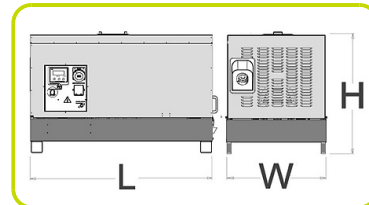

### Autonomy

Fuel consumption @ 75% PRP	l/h	2.77
Fuel consumption @ 100% PRP	l/h	3.71
Running time 75% PRP	h	18.41
Running time 100% PRP	h	13.75

### Installation data

Total air flow	m <sup>3</sup> /min	52.71
Exhaust gas flow	m <sup>3</sup> /min	2.6
Exhaust gas temperature	°C	450

### Electrical Data

Max current	A	19.77
Battery capacity	Ah	70
Circuit breaker	A	20

### Control panel availability

AUTOMATIC CONTROL PANEL	ACP
-------------------------	-----

## MCP - Manual control panel

Manual control panel, mounted on the genset and complete of: instrumentation, control, protection and sockets

### INSTRUMENTATION (ANALOGUE)

- Voltmeter (1 phase)
- Ammeter (1 phase)
- Hours-counter

### COMMANDS AND OTHERS

- Start/stop selector switch with key (Glow plugs preheating function also included).
- Emergency stop button



### PROTECTION WITH ALARM

- Battery charger failure
- Low oil pressure
- High engine temperature
- Magnetohermic protection III poles
- Thermal protections
- Differential protection




### PROTECTIONS WITH SHUTDOWN

- Battery charger failure
- Low oil pressure
- High engine temperature

### OTHERS

- Cover protection power switch

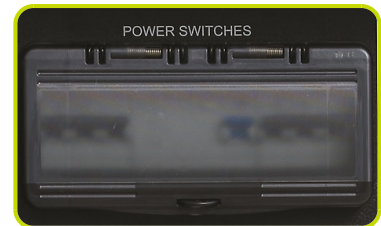

### OUT PUT PANEL MCP

Socket kit		Standard
Thermal protections		
3P+N+T CEE 400V 32A	n	1
3P+N+T CEE 400V 16A	n	1
2P+T CEE 230V 16A	n	2
230V 16A SCHUKO	n	1



## ACP - Automatic control panel

Automatic control panel mounted on the genset, complete with digital control unit for monitoring, control and protection of the generating set.

### INSTRUMENTATION DIGITAL

- Mains voltage.
- Generating set voltage (3 phases).
- Generating set frequency.
- Generator set current.
- Battery voltage
- Hours-counter.

### COMMANDS AND OTHERS

- Operation modes: OFF - Manual Starting - Automatic Starting.
- Push-buttons: start/stop, fault reset, up/down/page/enter selection.
- Emergency stop button.
- Remote starting availability.
- Automatic battery charger.
- USB port.

### PROTECTIONS WITH ALARM


- Engine protections: low oil pressure, high engine temperature
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage, battery charger failure

### PROTECTIONS WITH SHUTDOWN

- Engine protections: low oil pressure, high engine temperature
- Genset protection: under/over voltage, overload, under/over battery voltage
- Circuit breaker protection: III poles
- Differential protection

### OTHERS

- Cover protection Power switch

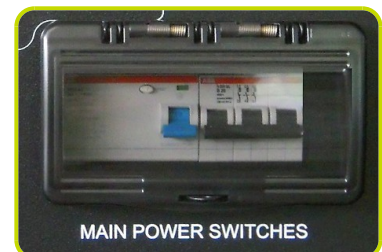

### ELECTRIC DISTRIBUTION PANEL ACP

Direct commutation command (ACP) terminal block		√
Connecting the power cables to the switch		√
3P+N+T CEE 400V 32A	n	1 [●]
[●] = Supplement available		

## Accessories

Items available as accessory equipment

Site trailer •

Road Trailer •



### LTS - Load Transfer Switch [Accessories for ACP Automatic Control Panel]

Mains/group switching panel, supplied in a special metal box/cabinet designed for coupling with Pramac ACP version generator sets.

#### Main features:

- Four-pole mains/group switching (contactors)
- Metal carpentry
- Emergency button positioned on the front panel
- Mechanical and electrical interlock
- Power connection terminal blocks (network; group; use)
- Multipolar connection cable L TS/ACP commands and controls



The complete ACP + LTS system controls the distribution network and, in the event of an interruption or anomaly, automatically starts the engine and within a few seconds supplies the load with the generator set, when the mains voltage returns to the nominal value, it switches automatically the load on the mains and, after a suitable cooling time, stops the motor.



rollaway.com

The information is aligned with the Data file at the time of download. Printed on 10/01/2023 (ID 10722)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

