


ASSEMBLY OF A PAVING




Lay the first paving element on the ground and place the spacers (at least 2 per contact side).

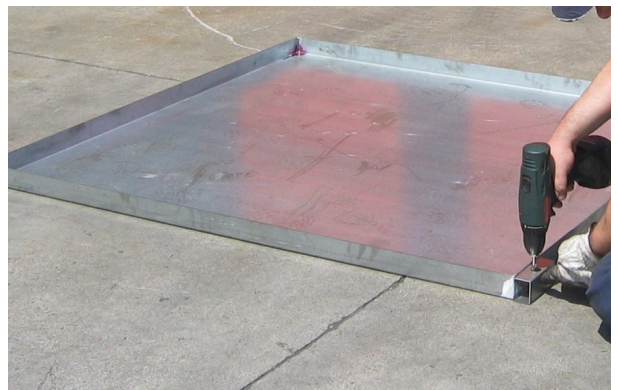

Secure the spacers using the dowels.

Place the next paving element.

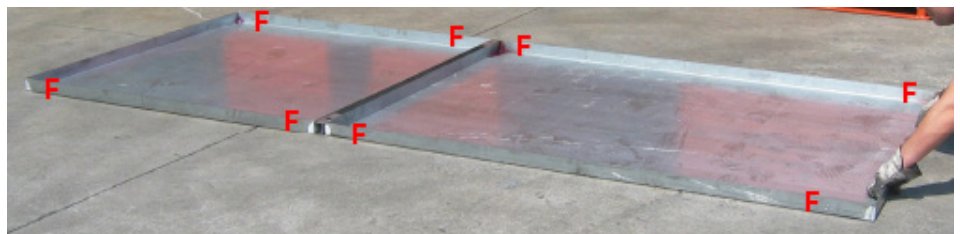

Secure the flooring elements to the ground using the fixing elements. The fixing elements (F) are placed only on the outer perimeter.



Cover the joints using the junction elements.



At the intersection (if there are 4 flooring elements) put the cross element and fix it to the ground.