



### Engine specifications

Engine Brand		Honda
Model		GX270 Recoil
Engine cooling system		Air
Displacement	cm <sup>3</sup>	270
Aspiration		Natural
Operating Speed-Nominal	rpm	3000
Speed governor		Mechanical
Fuel		Petrol
Oil capacity	l	1.1
Starting system		Recoil



### Alternator Specifications

Type		Brushless
Class		H
IP protection		23
Poles		2
Frequency	Hz	50
Voltage tolerance	%	+5, - 10 (cos $\phi$ 1)
Voltage regulation system		Capacitor

### Dimensional data

Length	(L) mm	729
Width	(W) mm	500
Height	(H) mm	536
Dry weight	kg	61
Fuel tank capacity	l	11

### Autonomy

Fuel consumption at 75% of Load	l/h	1.67
Fuel consumption at 100% of Load	l/h	2.22
Running time at 75% of load	h	6.59
Running time at 100% of load	h	4.95

### Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69

## GENSET CONTROL

### COMMANDS:

- Selector switch: OFF - ON
- Starting systems: Recoil
- Fuel Cock



### PROTECTIONS STANDARD:

- Thermal protection
- Oil Guard

### SOCKET TYPE


SCHUKO 230V 16A IP54	1
2P+T CEE 230V 16A IP44	1

## SUPPLEMENTS CONTROL (Available when ordered)

### Electrical box DPP + HM

Extra Protection with:

- Differential protection 30mA
- Circuit breaker
- Hourmeter

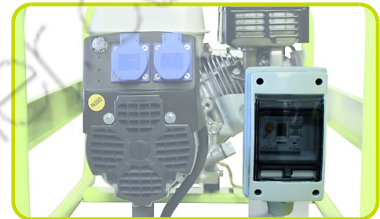

## ACCESSORIES

### TRANSPORTATION KIT

- With fix handles



- With folding handles



 rollawaycontainer.com

The information is aligned with the Data file at the time of download. Printed on 19/12/2022 (ID 2489)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package.  
Specifications subject to change without notice

