

PMI 2000



Pramac PMi series inverter: optimal solution to combine silent operation with less fuel consumption and tension stability; the inverters Pramac stabilize the output tension and supply power for all kinds of equipment. They guarantee maximum efficiency: adjusting the speed according to the required load, our inverters reduce the average fuel consumption.

FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise.




PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	2000
Rated Power	Watts	1700



Engine		
Brand		Pramac
Type		OHV
Exhaust emission level		Stage V
Operating Speed Nominal	rpm	Variable
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	0.45
Low Oil Shutdown		√

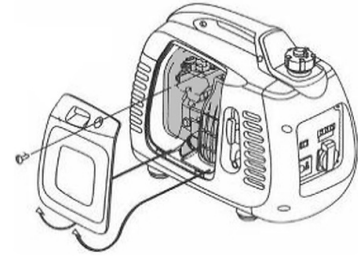

Alternator	
Voltage regulation system	Inverter

Dimensional data		
Length	(L) mm	535
Width	(W) mm	305
Height	(H) mm	460
Dry weight	kg	22
Carton box dimension LxWxH	mm	555x310x480



Autonomy		
Fuel tank capacity		3.5
Fuel consumption 50%	l/h	1.2
Running time 50%	h	3



Noise level		
Guaranteed noise level (LWA)	dB(A)	89

GENSET CONTROL

COMMANDS

- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

INSTRUMENTATION:

- Voltmeter, Frequency meter, Wattmeter and Hourmeter (display)
- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)

PROTECTIONS

- Overload
- Oil Guard

OUTPUT:

- DC12V 6A
- n°2 USB 5V 2A



SOCKET TYPE	
SCHUKO 230V 16A IP44	2

The information is aligned with the Data file at the time of download. Printed on 22/02/2022 (ID 10146)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

