


# MX 510

## MANUAL STACKER




### MX STACKER

MX Series is a robust and resistant stacker perfect to lift and transport your loads. Reinforced forks, steel pulley and forks precisely driven by rollers, among its main features, make it an excellent compromise between price and performance. The machine is also equipped with a foot pedal to lift forks, which considerably reduces the operator's effort.

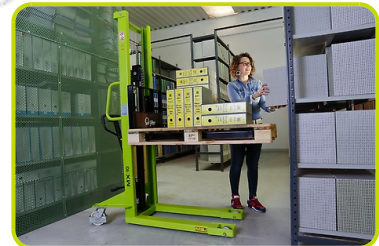

### TILLER

Increased ergonomic handle thanks to plastic cover and the 3 position control lever (down, neutral, up) to make lifting and transport operation even "lighter".

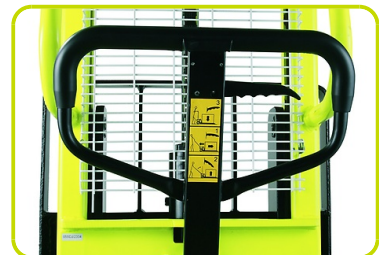

### STEEL PULLEY

A sturdy chain and a strong steel pulley ensure great resistance and reliability even working at maximum load capacity.



## FOOT PEDAL

The foot pedal can be used instead of the handle to raise the stacker forks to the desired height.



## WHEELS CONFIGURATIONS

### STANDARD:

Nylon steering wheels and nylon rollers



 rollawaycontainer.com

## Description

1.1 Manufacturer			LIFTER
1.3 Drive			Manual
1.4 Operator type			Pedestrian
1.5 Load capacity	Q	kg	500
1.6 Load centre distance	c	mm	600
1.8 Load axle to end forks	x	mm	800
1.9 Wheel base	y	mm	1240

## Weights

2.1 Service weight		kg	185
2.2 Axle load, laden rear		kg	483
2.2 Axle load, laden front		kg	202
2.3 Axle load, unladen front		kg	113
2.3 Axle load, unladen rear		kg	72

## Tyres/Chassis

3.1 Tyres: stabilizers wheels - front			NYLON
3.1 Tyres: rear wheels			NYLON
3.3 Tyre size: Load rollers - Diameter		mm	80
3.3 Tyre size: Load rollers - Width		mm	70
3.4 Tyre size: stabilizers wheels front - Diameter		mm	150
3.4 Tyre size: stabilizers wheels front - Width		mm	40
3.5 Tyre size: rear wheels - Q.ty (X=driven)		nr	2
3.6 Tread, front	b10	mm	600
3.7 Tread, rear	b11	mm	380

## Dimensions



4.2 Height, mast lowered		h1 mm	1490
4.3 Normal free lifting		h2 mm	910
4.4 Lift height		h3 mm	910
4.5 Height, mast extended		h4 mm	1490
4.9 Height of tiller in drive position max		h14 mm	1090
4.15 Height, lowered		h13 mm	90
4.19 Overall length		l1 mm	1690
4.20 Length to face of forks		l2 mm	540
4.21 Overall width		b1 mm	740
4.22 Fork dimensions - Thickness		s mm	60
4.22 Fork dimensions - Width		e mm	170
4.22 Fork dimensions - Length		l mm	1150
4.24 Fork carriage width		b3 mm	550
4.25 Distance between fork arms		b5 mm	550
4.32 Ground clearance, centre of wheelbase		m2 mm	30
4.34 Aisle width		Ast mm	2166
4.35 Turning radius		Wa mm	1400

### Performance data

5.2 Lifting speed laden	strokes	37
5.2 Lifting speed unladen	strokes	37
5.3 Lowering speed laden	m/s	0.16
5.3 Lowering speed unladen	m/s	0.05

### Residual lifting capacity

Lifting height (H3) 1000 mm	Kg	500
-----------------------------	----	-----

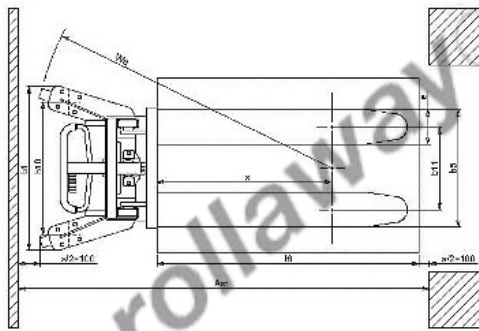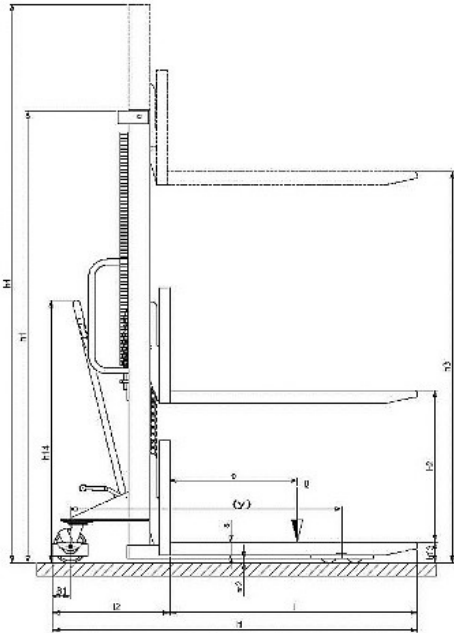

The information is aligned with the Data file at the time of download. Printed on 21/02/2022 (ID 642)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

