


CX14 GEL - 1150X525

SMALL SIZE, LONG ENDURANCE



ELECTRIC PALLET TRUCK - CX14

The new CX14 electric pallet trucks are compact, lightweight and easy to use. They have been specifically designed for use in confined spaces within rail, shops, supermarkets and on-board delivery vehicles. These simple and efficient pallet trucks are built to last and are perfect for all your pedestrian material handling needs.

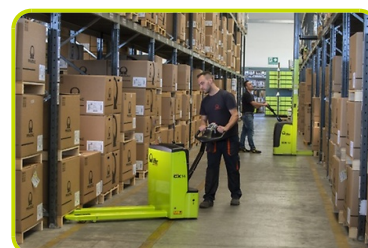

GEL VERSION

The GEL version is equipped with powerful premium brand gel batteries which ensure longer endurance and greater number of charging cycles. Featuring reliable DC drive system, a tiller made with metal tube and ergonomic fingertip controls, this configuration offers best value for money.




MANOEUVRABILITY

- Short chassis dimension (L2 = 410 mm) to offer improved manoeuvrability in confined spaces.
- Compact design perfect for working in narrow areas and corridors, featuring a tighter turning radius (Wa = 1345 mm) for faster pinwheeling and easier navigation in congested spaces.
- Smooth rounded fork tips and entry/exit rollers to optimize pallet handling.




RELIABILITY

- Robust frame (metal motor wheel protection 6 mm thick) designed to guarantee maximum durability and resistance to torsion and heavy loads.
- Battery discharge indicator to allow easy management.
- Easy access to electrical components for maintenance.

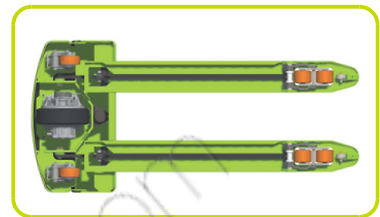

PRODUCTIVITY

- Strong ABS cover with storage tray on top, easily removable for simple access to batteries and key components speeding-up maintenance operations.
- Easy access to the motorwheel components through dedicated inspection opening.
- Schuko plug with spiral cable and on board battery charger.

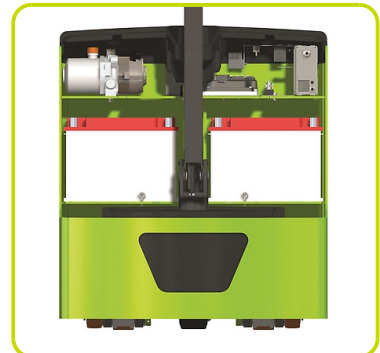

INTELLIGENT TILLER

- Ergonomic tiller designed for both left and right handed operation.
- Butterfly valves for traction control.
- Safety push button with warning buzzer.
- Turtle function for moving in tight areas with the handle in vertical position while remaining almost within the profile of the machine.



TURTLE MODE SWITCH

Offered as standard, this function enables operating the truck in confined spaces: it allows the unit to travel with the tiller in upright position.

This function is activated by pressing the turtle button on the tiller and rotating the drive control throttle. The truck travels at limited speed.

Release the button to disable this function.




ON-BOARD BATTERY CHARGER

Built-in battery charger provides a convenient charging solution and eliminates the need to remove the battery from the machine.



TRACTION & SAFETY

Traction is granted by the biggest heavy-duty stabilizer wheels (100x40 mm) in the category, with heavy duty spring. All linkage connections done through bushings that increase stability and durability.

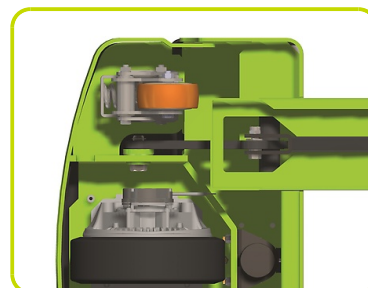

ROLLERS

Standard configuration provided with single polyurethane rollers. Available tandem rollers as optional.



Description

1.1 Manufacturer	PR INDUSTRIAL		
Lift	Electric		
1.3 Drive	Electric		
1.4 Operator type	Pedestrian		
1.5 Load capacity	Q	kg	1400
1.6 Load centre distance	c	mm	600
1.8 Load axle to end forks	x	mm	935
1.9 Wheel base	y	mm	1196

Weights

2.1 Service weight (battery included)	kg	252
2.2 Axle load, laden rear	kg	1047
2.2 Axle load, laden front	kg	605
2.3 Axle load, unladen front	kg	210
2.3 Axle load, unladen rear	kg	42

Tyres/Chassis

3.1 Tyres: front wheels	RUBBER	
3.1 Tyres: stabilizers wheels - front	POLY.C.	
3.1 Tyres: rear wheels	POLY.C.	
3.2 Tyre size: Steering wheels - Width	mm	76
3.2 Tyre size: Steering wheels - Diameter	mm	250
3.3 Tyre size: Load rollers - Diameter	mm	82
3.3 Tyre size: Load rollers - Width	mm	80
3.4 Tyre size: stabilizers wheels front - Diameter	mm	100
3.4 Tyre size: stabilizers wheels front - Width	mm	40
3.5 Tyre size: rear wheels - Q.ty (X=driven)	nr	2
3.5 Tyre size: front wheels - Q.ty (X=driven)	nr	1x
3.6 Tread, front	b10 mm	530
3.7 Tread, rear	b11 mm	375

Dimensions

4.4 Lift height	h3 mm	115
4.9 Height of tiller in drive position max	h14 mm	1230
4.9 Height of tiller in drive position min	h14 mm	730
4.15 Height, lowered	h13 mm	85
4.19 Overall lenght	l1 mm	1560
4.20 Lenght to face of forks	l2 mm	410
4.21 Overall width	b1 mm	720
4.22 Fork dimensions - Thickness	s mm	55
4.22 Fork dimensions - Width	e mm	150
4.22 Fork dimensions - Lenght	l mm	1150
4.25 Distance between fork arms	b5 mm	525
4.32 Ground clearance, centre of wheelbase	m2 mm	30
4.34 Aisle width	Ast mm	1810
4.35 Turning radius	Wa mm	1345

Performance data

5.1 Travel speed laden	Km/h	4.4
5.1 Travel speed unladen	Km/h	4.8
5.2 Lifting speed laden	m/s	0.03
5.2 Lifting speed unladen	m/s	0.04
5.3 Lowering speed laden	m/s	0.05
5.3 Lowering speed unladen	m/s	0.04
5.8 Max gradeability laden	%	5
5.8 Max gradeability unladen	%	10
5.10 Service brake	Electric	

Electric motors

6.1 Drive motor power	kW	0.7
6.2 Lift motor power	kW	1.0
Battery Type	Type	GEL
6.4 Battery voltage	V	24
6.4 Battery capacity, Min	Ah	65
6.4 Battery capacity, Max	Ah	65
6.5 Battery weight, Min	kg	61
6.5 Battery weight, Max	kg	61
6.6 Energy consumption according to VDI cycle	kWh/h	0.25
8.4 Sound level at driver's ear	dB(A)	59

